



SYM	ECN NO	DATE	APPRVAL
△			

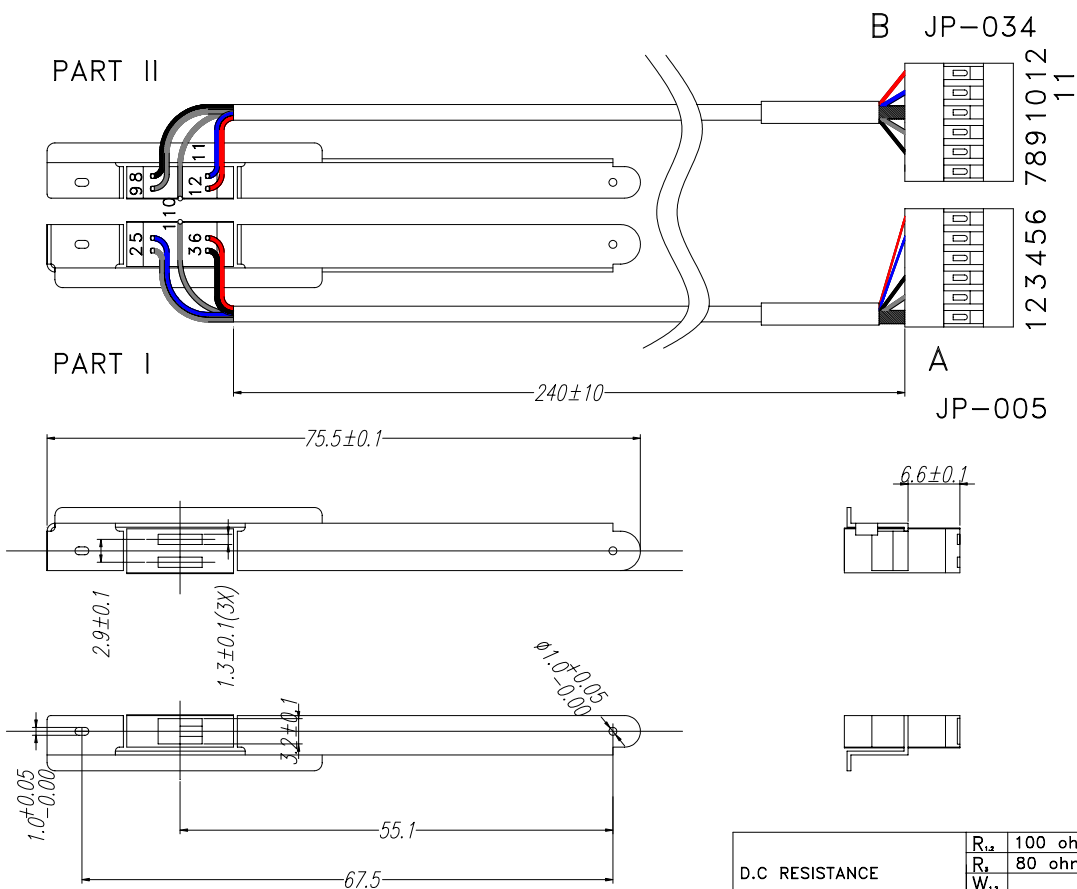

PART II: 3Trk Read/Write  
 PART I: 1,2Trk Read Only

PIN	COLOR	POSITION
1,10	Shielder Cable	Ground
2	Black	1 Trk R
3	White	1 Trk R
4,7		NC
5	Blue	2 Trk R
6	Red	2 Trk R
8	White	3 Trk W
9	Black	3 Trk W
11	Blue	3 Trk R
12	Red	3 Trk R

D.C RESISTANCE	R <sub>1,2</sub>	100 ohm±20%
	R <sub>2,3</sub>	80 ohm±20%
	W <sub>1,2</sub>	
INDUCTANCE(1KHZ,300MV)	W <sub>1,2</sub>	55 ohm±20%
	R <sub>1,2</sub>	25 mH±25%
	R <sub>2,3</sub>	30 mH±25%
	W <sub>1,2</sub>	3.5 mH±25%
READ OUTPUT		15 mVp-p
RECORDING CURRENT		50 mA MAX
INSULATION(250V D.C)		50 MOHM(MIN)
EARTHING RESISTANCE		10 OHM(MAX)
RECORDING DENSITY		210 BPI
TAPE TYPE		3M-176
TAPE SPEED		7.5 IPS
CORE		sendust

MATERIAL		Q'TY	1	FINISH	BARREL	
TOLERANCE	X.X = ±0.1	SCALE	2/1	MM	REV	A
	X.XX = ±0.05	DATE	2003 03. 12			
DWG	DGN	CHK	APP	TITLE	DB-S3RW-101	
ZHC				MODEL	ATM-6	
 <b>SUZHOU SPARK</b>				DWG. NO	01211006	

苏州星火磁电技术有限公司图纸