
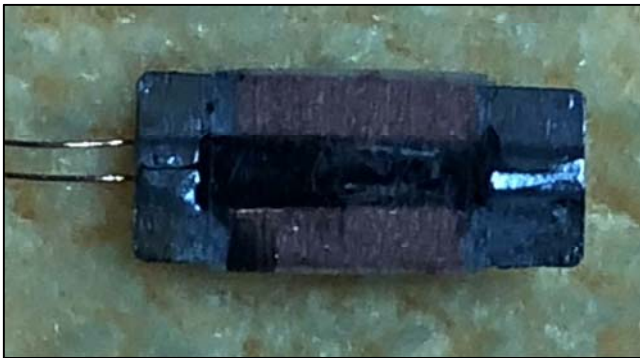


SYM	ECN NO	DATE	APPRVAL
△			

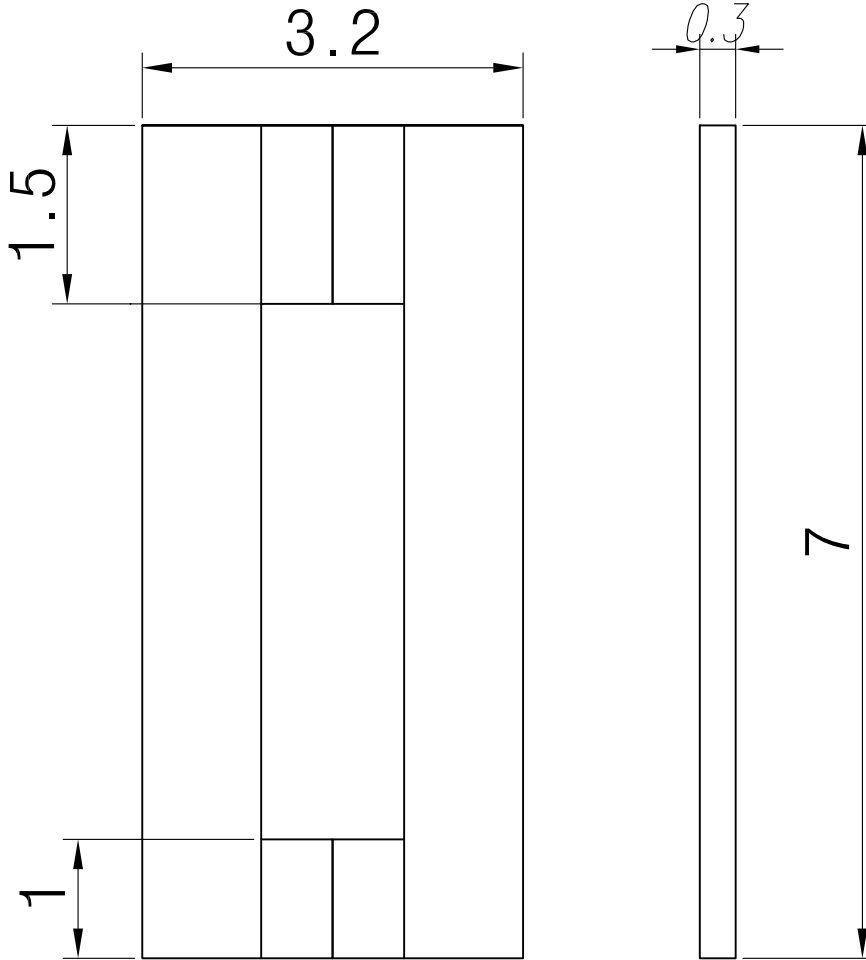

Specification

Inductance	mH	6±35%	1KHz	100 μA
DC Resistance	Ω	130±25%	DC	at 20°
Recording Density	BPI	210		
Tape Speed	IPS	7.5	Measuring Tape	
Read Output	mVp-p	4 Min	PM50-78	
Insulation R	MΩ	50	250V DC	
Core Earth	Ω	100 Max	100 μA	
Gap Length	μm	15±10		
Track Width	mm	1.5±0.1		
Head Life	Times	100,000Min		

UNLESS OTHERWISE NOTED:

1) DIMENSIONS ARE IN MILLIMETERS

2) TOLERANCES:

.X ± .1

.XX ± .05

ANGLES ± 0°~30'

1 TRK READ HEAD

SCALE

$\frac{4}{1}$

MM

REV

A

CORE MATERIAL: permalloy

MODEL

SR11-003

DWG. NO

02010030


DWG

DGN

CHK

APP

ZHC



SUZHOU SPARK