


SYM	ECN NO	DATE	APPRVAL
△			



### Specification

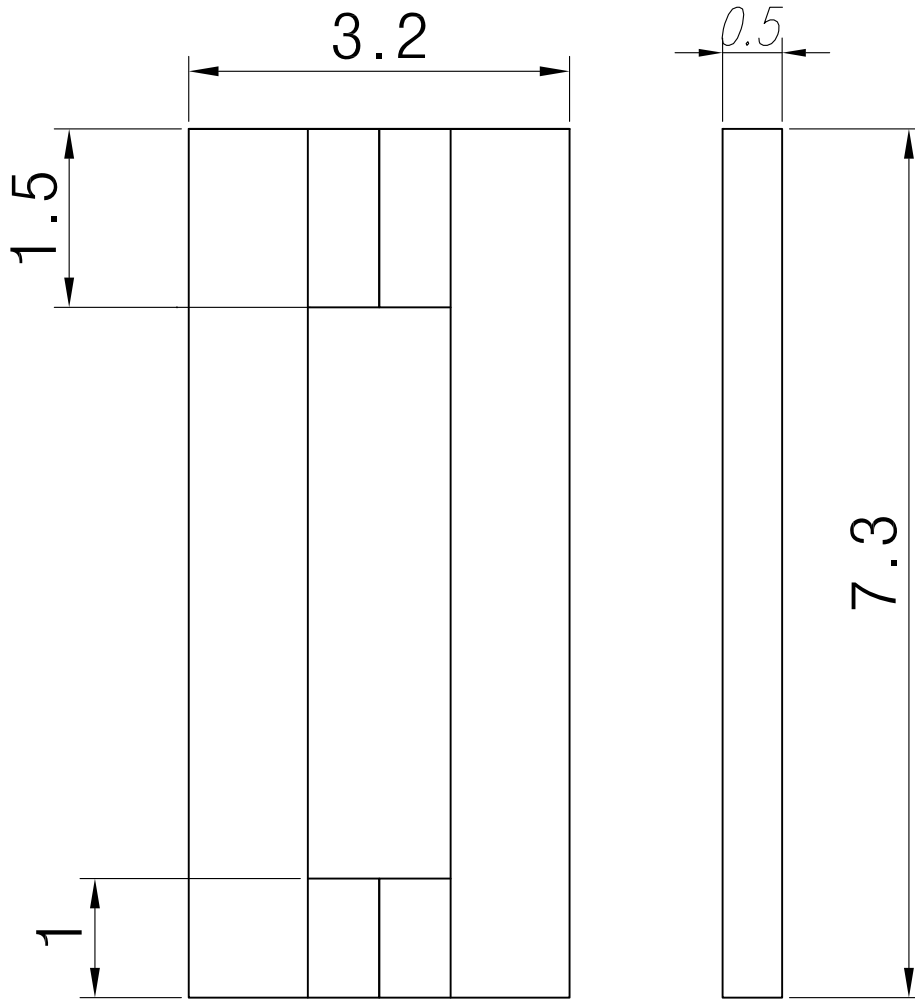

Inductance	mH	10±35%	1KHz	100 μA
DC Resistance	Ω	130±25%	DC	at 20°
Recording Density	BPI	210		
Tape Speed	IPS	7.5	Measuring Tape	
Read Output	mVp-p	6 Min	PM50-78	
Insulation R	MΩ	50	250V DC	
Core Earth	Ω	100 Max	100 μA	
Gap Length	μm	15±10		
Track Width	mm	1.5±0.1		
Head Life	Times	500,000Min		

UNLESS OTHERWISE NOTED:  
 1) DIMENSIONS ARE IN MILLIMETERS  
 2) TOLERANCES:  
 .X ± .1  
 .XX ± .05  
 ANGLES ± 0°~30'

SCALE  $\frac{4}{1}$  MM REV A

CORE MATERIAL: permalloy


MODEL SR11-005

DWG. NO 02010029

1 TRK READ HEAD

DWG DGN CHK APP

ZHC



**SUZHOU SPARK**