


SYM	ECN NO	DATE	APPRVAL
△			

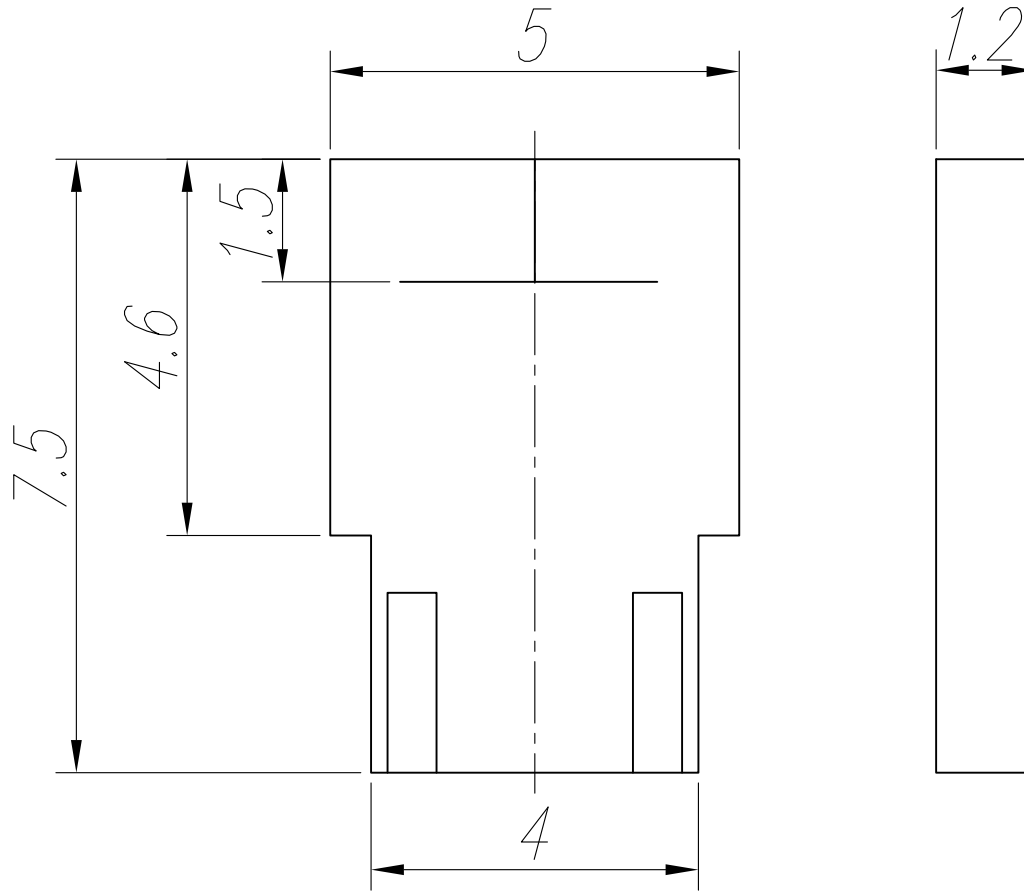

Specification

Inductance	mH	12±35%	1KHz	100 μ A
DC Resistance	Ω	270±25%	DC	at 20°
Recording Density	BPI	210		
Tape Speed	IPS	7.5	Measuring Tape	
Read Output	mVp-p	10 Min	PM50-78	
Insulation R	MΩ	50	250V DC	
Core Earth	Ω	100 Max	100 μ A	
Gap Length	μm	15±10		
Track Width	mm	1.5±0.1		
Head Life	Times	500,000Min		

UNLESS OTHERWISE NOTED:

1) DIMENSIONS ARE IN MILLIMETERS

2) TOLERANCES:

.X ± .1

.XX ± .05

ANGLES ± 0°~30'

SCALE $\frac{4}{1}$ MM REV A

CORE MATERIAL: permalloy


MODEL SR11-012

DWG. NO 02010028

1 TRK READ HEAD

DWG DGN CHK APP

ZHC



SUZHOU SPARK