
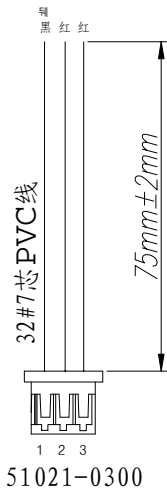


SYM △	ECN NO	DATE	APPRVAL
----------	--------	------	---------

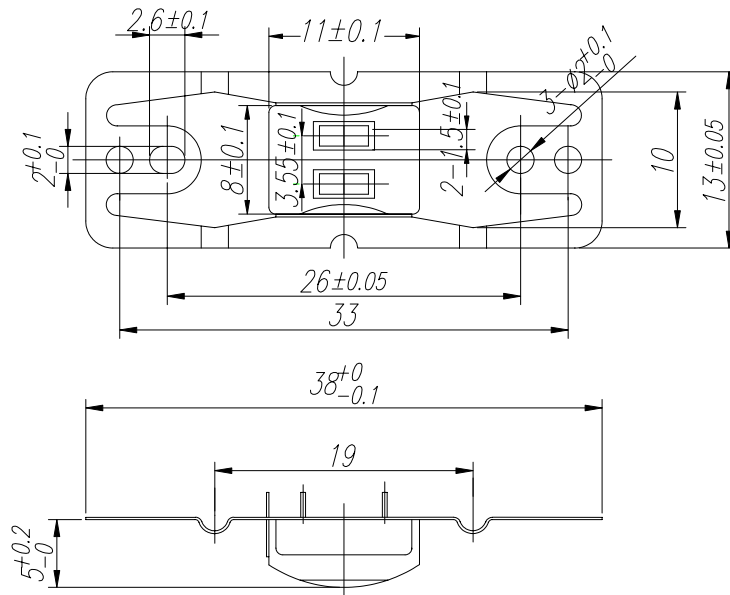

Specification

Inductance	mH	28±30%	1KHz	100 μA at 20°
DC Resistance	Ω	140±25%	DC	
Recording Density	BPI	210		
Tape Speed	IPS	7.5	Measuring Tape PM50-78	
Read Output	mVp-p	20±25%		
Insulation R	MΩ	50	250V DC	
Core Earth	Ω	100 Max	100 μA	
Gap Length	μm	12.5±6		
Track Width	mm	1.5±0.1		
Head Life	Times	500,000Min		

UNLESS OTHERWISE NOTED:
 1) DIMENSIONS ARE IN MILLIMETERS
 2) TOLERANCES:
 .X ± .1
 .XX ± .05
 ANGLES ± 0°~30'


SCALE 2/1 MM REV A

CORE MATERIAL: PERMALLOY

MODEL SR13-4

2 TRK READ HEAD

DWG. NO 01010408



SUZHOU SPARK

DWG	DGN	CHK	APP
ZHC			

苏州星火磁电技术有限公司图纸