
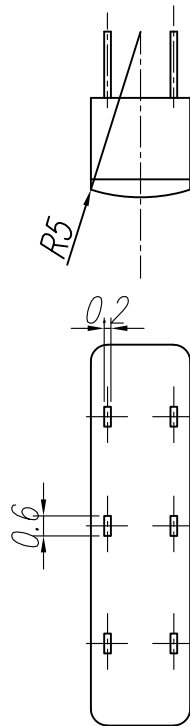
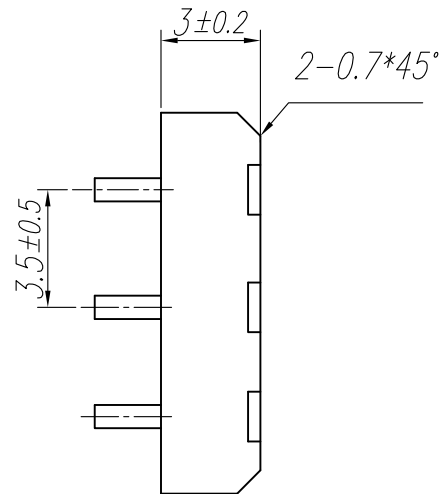


SYM	ECN NO	DATE	APPRVAL
△			

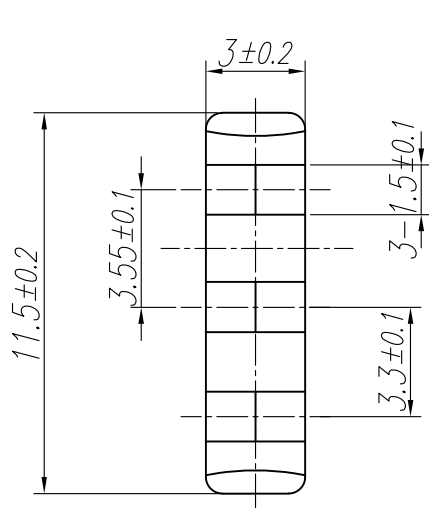

Specification

Inductance	mH	28±30%	1KHz	100 μ A
DC Resistance	Ω	180±25%	DC	at 20°
Recording Density	BPI	210		
Tape Speed	IPS	7.5	Measuring Tape	
Read Output	mVp-p	20 Min	PM50-78	
Insulation R	MΩ	50	250V DC	
Core Earth	Ω	100 Max	100 μ A	
Gap Length	μm	12.5±6		
Track Width	mm	1.5±0.1		
Head Life	Times	500,000Min		

UNLESS OTHERWISE NOTED:

1) DIMENSIONS ARE IN MILLIMETERS

2) TOLERANCES:

.X ± .1

.XX ± .05

ANGLES ± 0°~30'

3 TRK READ HEAD

SCALE

4
1

MM

REV

A

CORE MATERIAL: Sendust

MODEL

SR33-030

DWG. NO

02030038


DWG

DGN

CHK

APP

ZHC



SUZHOU SPARK