


SYM	ECN NO	DATE	APPRVAL
△			

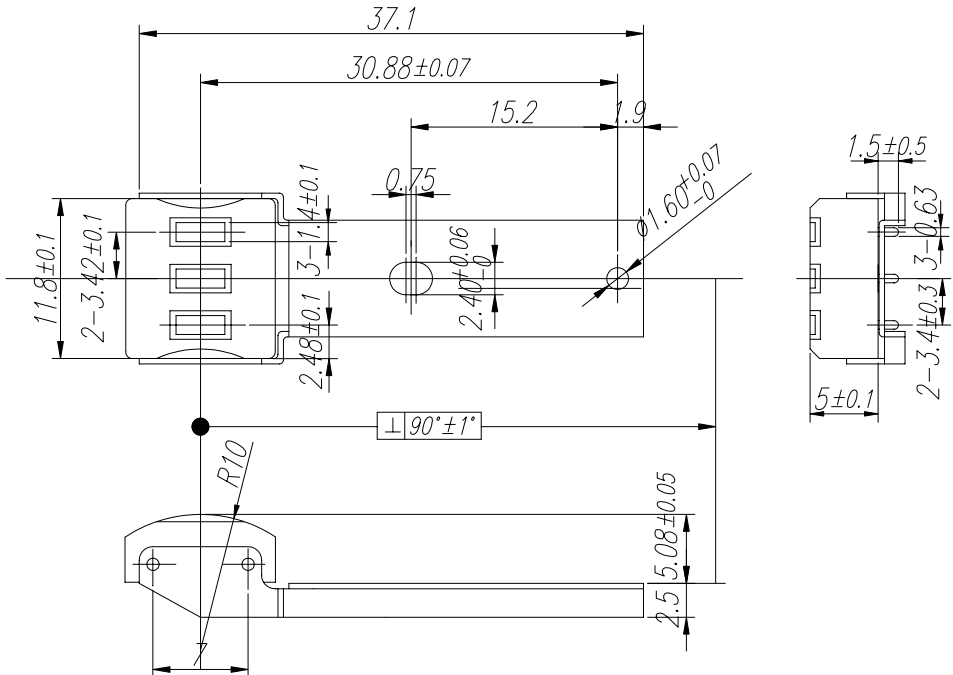


Specification

Inductance	mH	100± 30%	1KHz	100 mA
DC Resistance	Ω	220± 25%	DC	at 20°
Recording Density	BPI	210		
Tape Speed	IPS	7.5	Measuring Tape	
Read Output	mVp-p	36± 25%	PM50-78	
Insulation R	MΩ	50	250V DC	
Core Earth	Ω	100 Max	100 mA	
Gap Length	μ m	12.5± 6		
Track Width	mm	1.4 ± 0.1		
Head Life	Times	500,000Min		

UNLESS OTHERWISE NOTED:
 1) DIMENSIONS ARE IN MILLIMETERS
 2) TOLERANCES:
 .X ± .1
 .XX ± .05
 ANGLES ± 0°~30'

SCALE	$\frac{2}{1}$	MM	REV	A
MODEL	CORE MATERIAL: PERMALLOY			
DWG. NO	SR33-7			
DWG	DGN	CHK	APP	
ZHC				



SUZHOU SPARK